

Gear-Motor-Specifications

HILBA-drive including:


Motor

Name: A-max 32
 Typ: DC
 Voltage: 24V
 Power: 20W
 IP code: IP24
 Manufacturer: Maxon Motor
 Part number: 236662
 Weight: 0.24kg
 Nominal torque: 0.047Nm
 Nominal speed: 5040RPM
 Nominal current: 1.4A
 Stall current: 6.1A
 No load speed: 6460RPM
 Torque constant: 0.035 Nm/A
 Speed constant: 0.00003 Nm/RPM

Gearhead

Name: PI32
 Typ: Planetengetriebe
 IP code: IP54
 Ambient temperature range: -30°C bis +90°C
 Reduction: 13.73:1
 Efficiency: 0.82
 Weight: 0.38kg
 Nominal torque: 2.5Nm
 Maximal speed: 5000RPM
 Backlash: 1.4°
 Self-locking: No

Drive

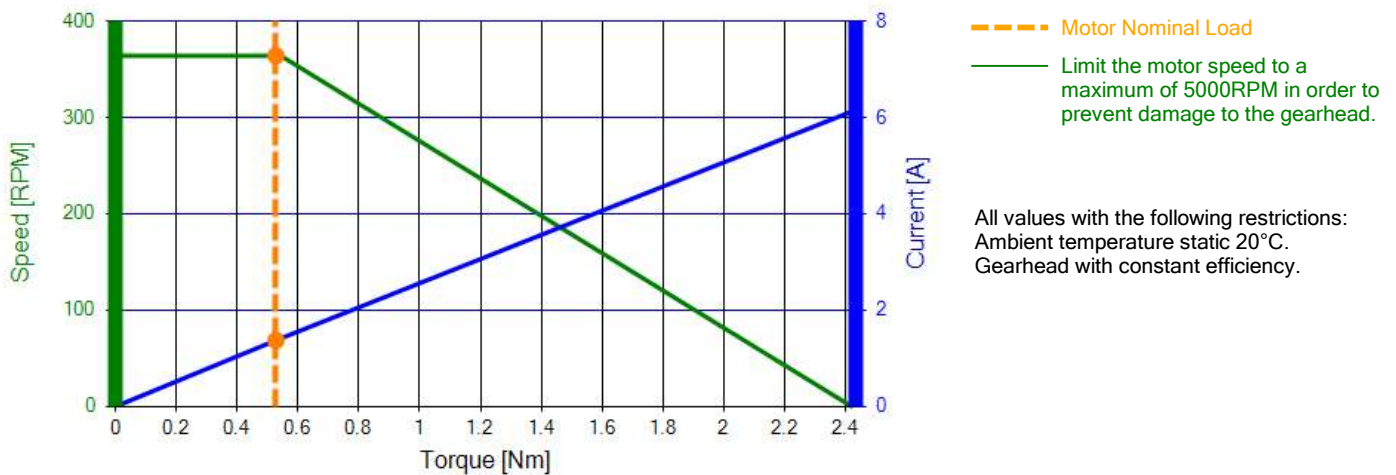

No-load Operation

Torque: 0.017Nm
 Speed: 364RPM
 Current: 0.043A

Motor Nominal Load

Torque: 0.53Nm
 Speed: 364RPM
 Current: 1.4A

Stall

Torque: 2.4Nm
 Speed: 0RPM
 Current: 6.1A

Limit the motor speed to a maximum of 5000RPM in order to prevent damage to the gearhead.

Limit the motor speed to a maximum of 5000RPM in order to prevent damage to the gearhead.